

HETEROGENEOUS
LIGHT COMMERCIAL

GRABO Soundtex 5.0


LIGHT COMMERCIAL VINYL FLOOR COVERING

RECOMMENDED USAGE

- > Nursery homes
- > Preschools
- > Libraries
- > Dormitory rooms

Grabo SOUNDTEX 5.0 floorings combine good technical characteristics with extra design features. The product ensures excellent residual indentation, good comfort feeling, and thanks to the non-woven backing it can be installed without glue, which allows easier and quicker installation, especially in renovation projects.

CONSTRUCTION

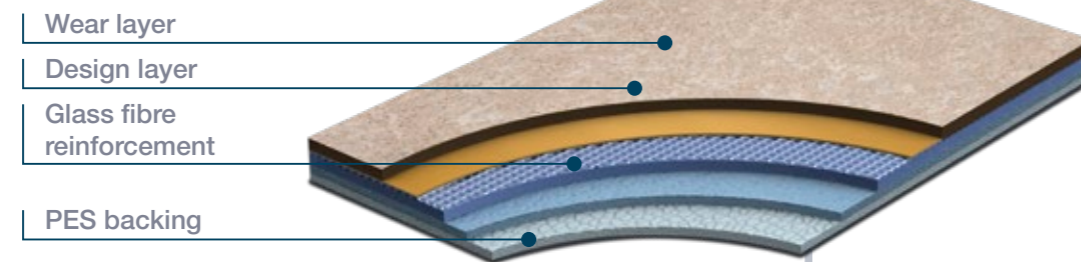

SPECIFICATIONS

DESCRIPTION

Construction	heterogeneous	
Total thickness	EN ISO 24346	3,2 mm
Wear layer thickness	EN ISO 24340	0,5 mm
Width of roll	EN ISO 24341	2 3 4 m
Standard length of rolls	EN ISO 24341	25 lm
Normal length of rolls	EN ISO 24341	18-27 lm
Total weight	EN ISO 23997	2,2 kg/m ²

CLASSIFICATION


Classification	EN 685	class: 23/33/42
----------------	--------	-----------------

PERFORMANCE


Residual indentation	EN ISO 24343	max. 0,35 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Cf1-s1
Slip resistance	EN 13893	class: R9
Light fastness	EN 20105 B02	grade 6
Abrasion group	MSZ EN 660-1	T
Castor chair resistance	EN ISO 4918	✓
Warranty	7 year	

SOUNDTEX 5.0


Marble

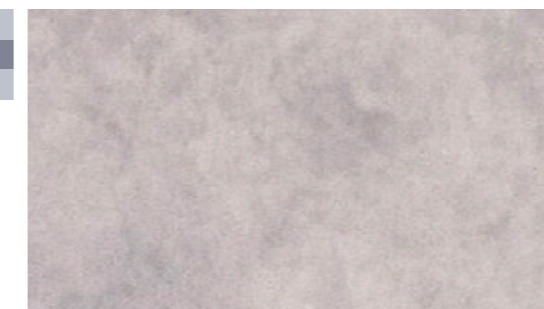


4547-505-4 < 2 | 4 m >

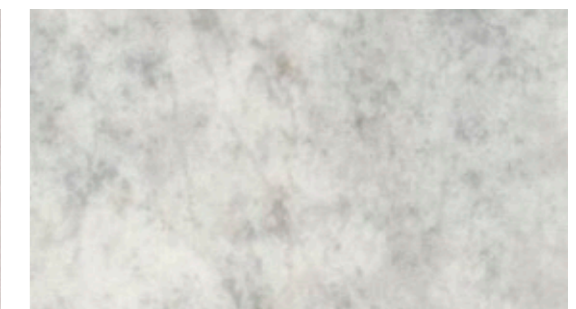


4547-511-4 < 2 | 4 m

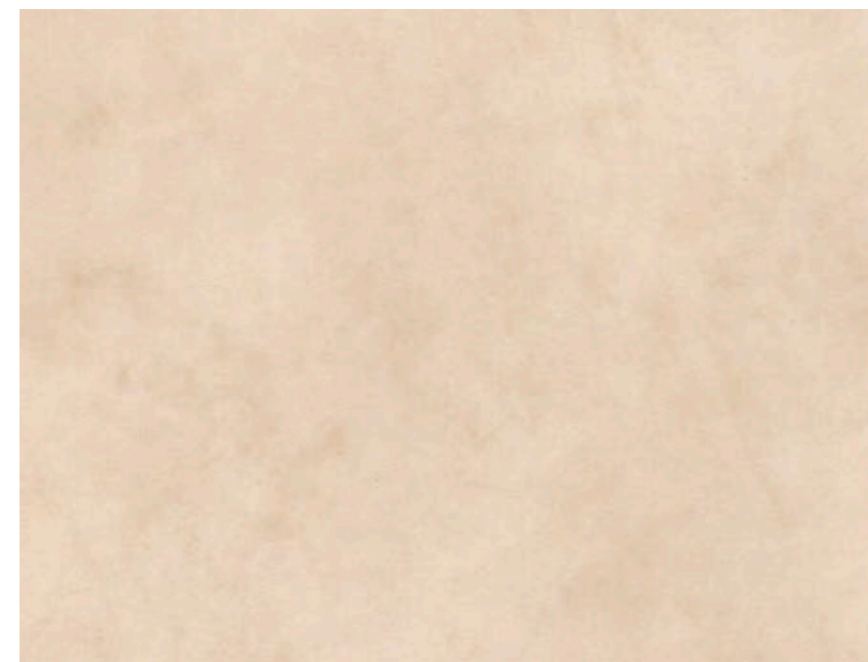

4547-509 < 2 | 4 m

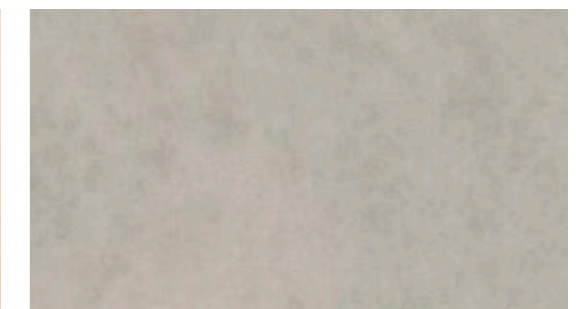

4547-510-4 < 2 | 4 m

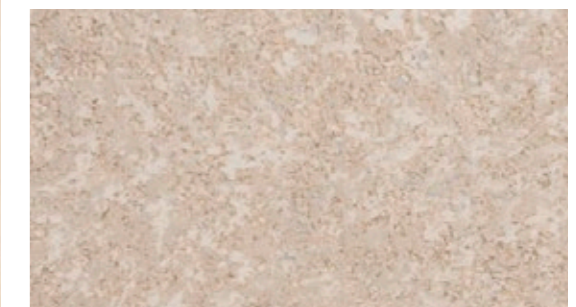

4261-451-3 < 2 | 4 m

3.2
mm

TOTAL THICKNESS

2.2
kg/m²

TOTAL WEIGHT

2 | 3 | 4
m

WIDTH OF ROLLS

23
33 42

EUROPEAN
CLASSIFICATION


Natural



4235-456-5 < 2 | 4 m >




4259-504-5 < 2 | 4 m >

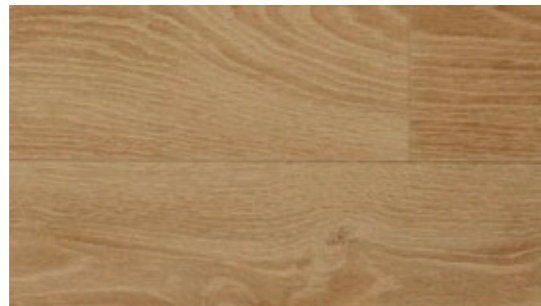

4263-482-4 < 2 | 4 m >



4259-503-5 < 2 | 4 m >

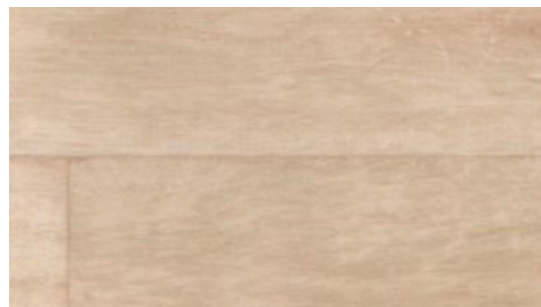


4235-452-5 < 2 | 4 m >




4259-501-5 < 2 | 4 m >



4235-469-5 < 2 | 4 m >

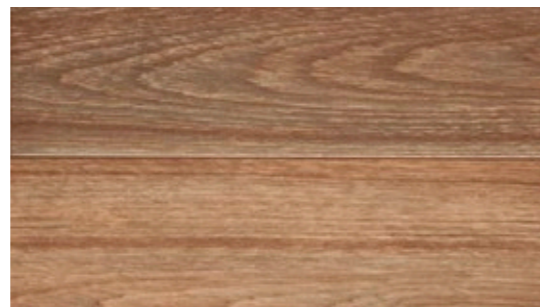

4266-453-4 < 2 | 4 m >

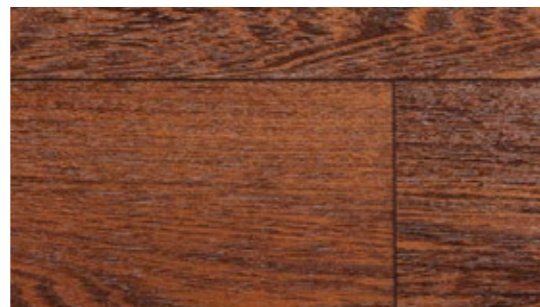

4262-467-4 < 2 | 4 m >

